


Dyna_Pro

L-type screen workstation

NOVAH[®]

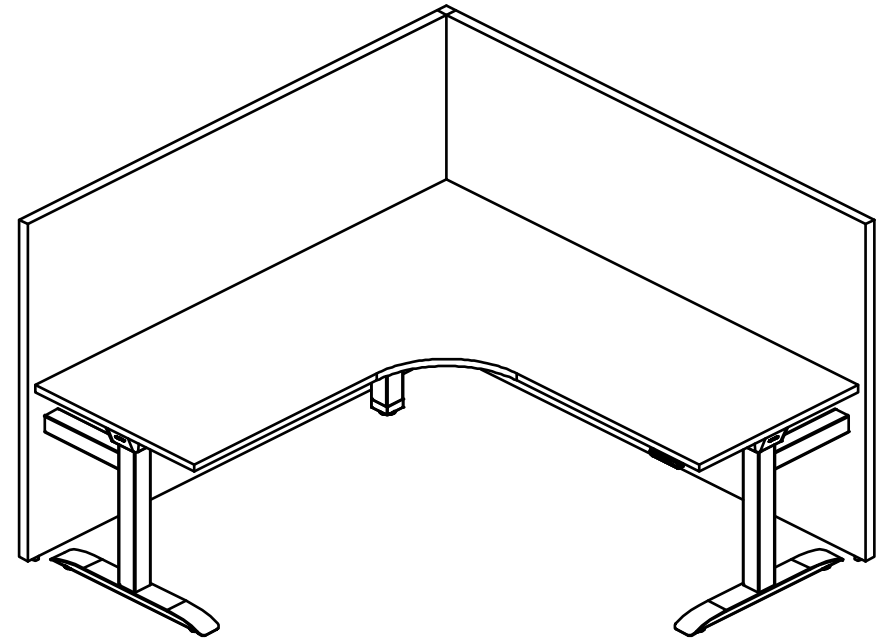

NOVAH System Technology Co.,Ltd.
Tel: 400-115-1688
Web: www.novah.cc
Mail: int@novah.cc

NOVAH[®]

Product Parts List



(Hexagon socket cylindrical head screw M6-40)



(Hexagon socket cylindrical head screw M6-16)



(Hexagon socket cylindrical head screw M6-12)



(Hexagon socket cylindrical head screw M6-14/Blackening)



(Cross recessed pan head tapping screw ST3.5-12)



(Cross big flat head self-tapping screws ST5.5-20)



(Hexagon socket cylindrical head screw M8-20)



(Cross recessed pan head tapping screw ST4-16)



(Cross recessed pan head tapping screw ST4.2-13)



(Cross recessed pan head tapping screw ST3.5-16)



(Cross recessed pan head tapping screw ST3.5-20)



(Cross recessed pan head tapping screw ST4.2-45)


Step 1

1. Place the lifting column (1) and wireway under the main desk (4) as shown in the figure

2. Install the lifting column (1) + bottom feet (2) + adjustable feet (3) (Hexagon socket cylindrical head screw M6-16)

3. Install the lifting column (1) + bottom feet (5) + adjustable feet (3) (Hexagon socket cylindrical head screw M6-40)

Locking screw of bottom feet

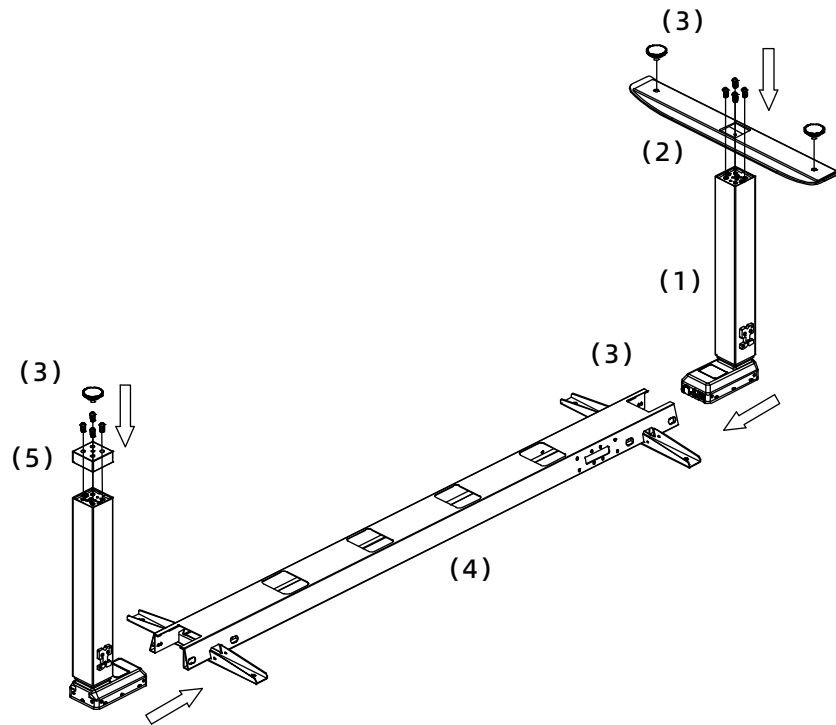

Step 2


Install the main desk frame of L-type workstation

1. Install the lifting column (1) and wireway under the main desk (4) (Hexagon socket cylindrical head screw M6-12)

2. Install the lifting column (1) and connecting pipe (6) (Hexagon socket cylindrical head screw M6-14/Blackening)

Pay attention to the direction of the cutouts of incoming line of connecting pipe

3. Desk frame turning over

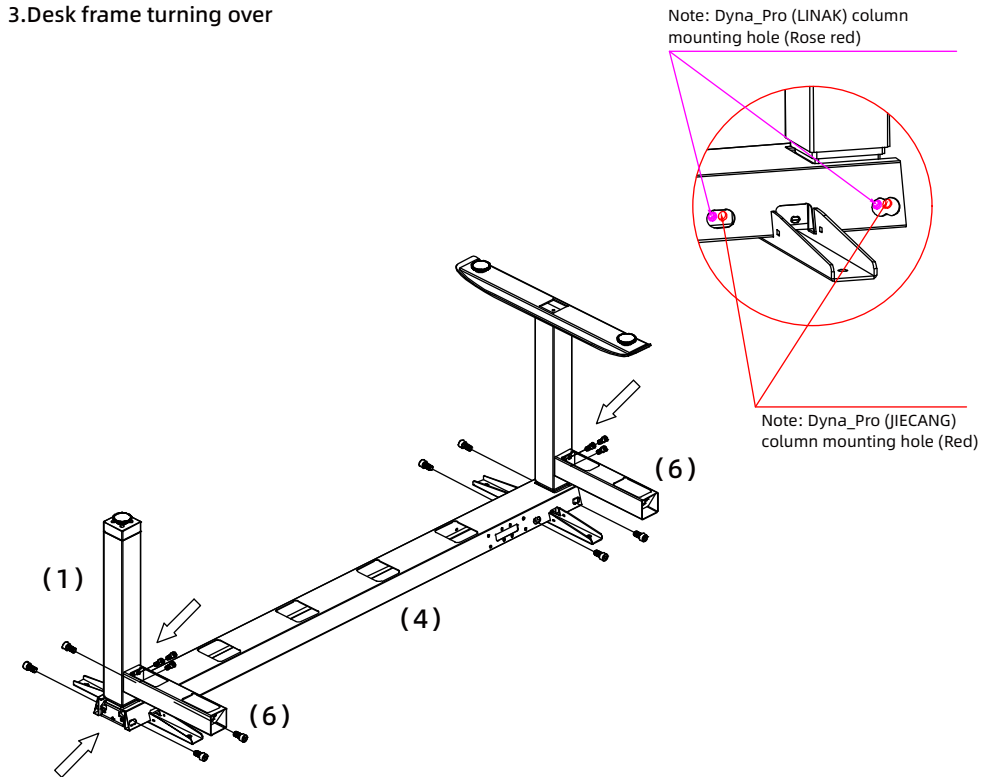


Note: Do not lock the screws on both sides of the lifting column, and the screw length can only be M6-12. Otherwise, it may cause damages to the motor and abnormal noise.

Step 3

1. Install the rubber gasket of table board (7)

2. Install the heightened pad (8)
(Cross recessed head tapping screw ST 3.5-12)

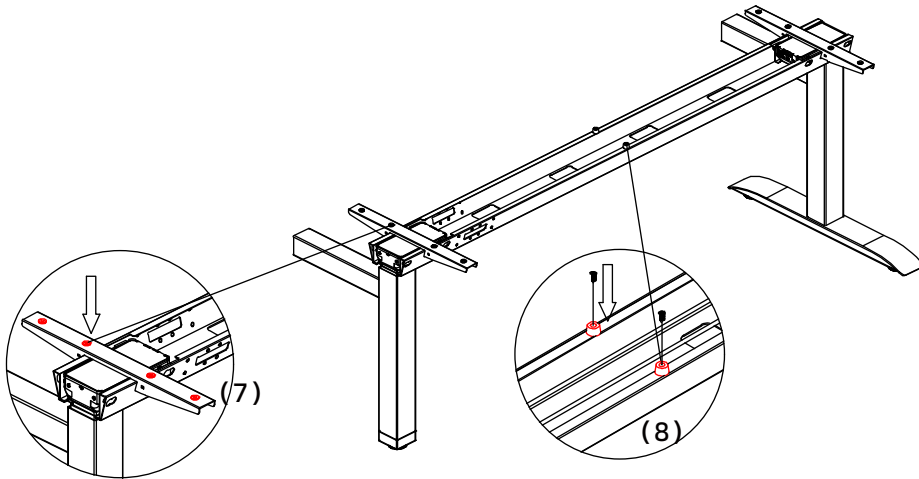


Step 4

Install the auxiliary desk frame of L-type workstation

1. Place the lifting column (1) and wireway under the auxiliary desk (9) as shown in the figure

2. Install the lifting column (1) + bottom feet (2) + adjustable feet (3)
(Hexagon socket cylindrical head screw M6-16)
Locking screw of bottom feet

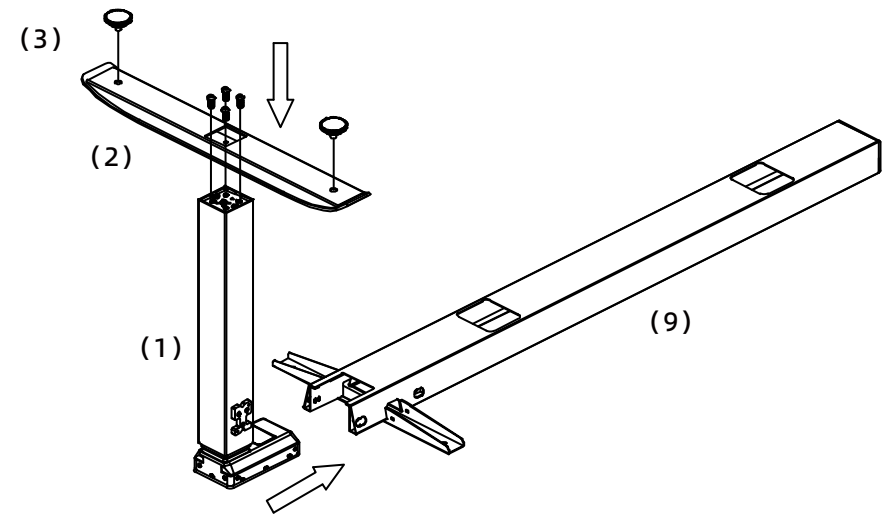

After adjusting the position, lock the screws of wireway under the desk


Step 5

Install the auxiliary desk frame of L-type workstation

1. Install the lifting column (1) and wireway under the auxiliary desk (9)
(Hexagon socket cylindrical head screw M6-12)

2. Install the lifting column (1) and connecting pipe (6)
(Hexagon socket cylindrical head screw M6-14/Blackening)

3. Desk frame turning over

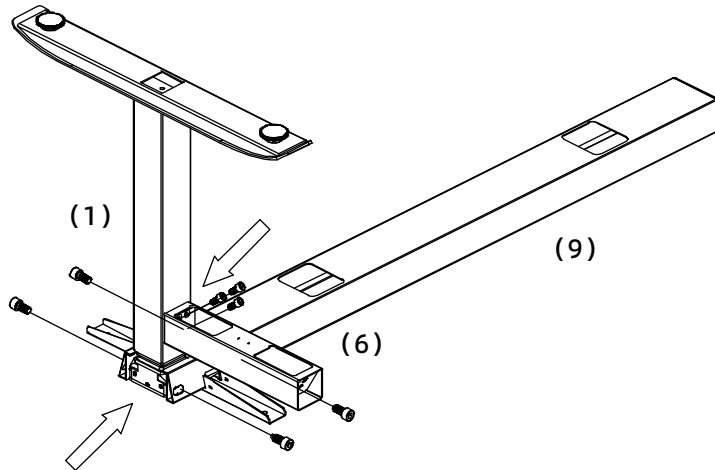


- 1. Never lock the screws of the wireway under the desk and lifting column
- 2. Never fasten the screws of screen connecting pipe and lifting column

Step 6

Install the main/auxiliary desk frame of L-type workstation

1. Place main desk frame and auxiliary desk frame of the lifting table as shown in the figure


2. Install the main/auxiliary desk frame
(Hexagon socket cylindrical head screw M6-12)

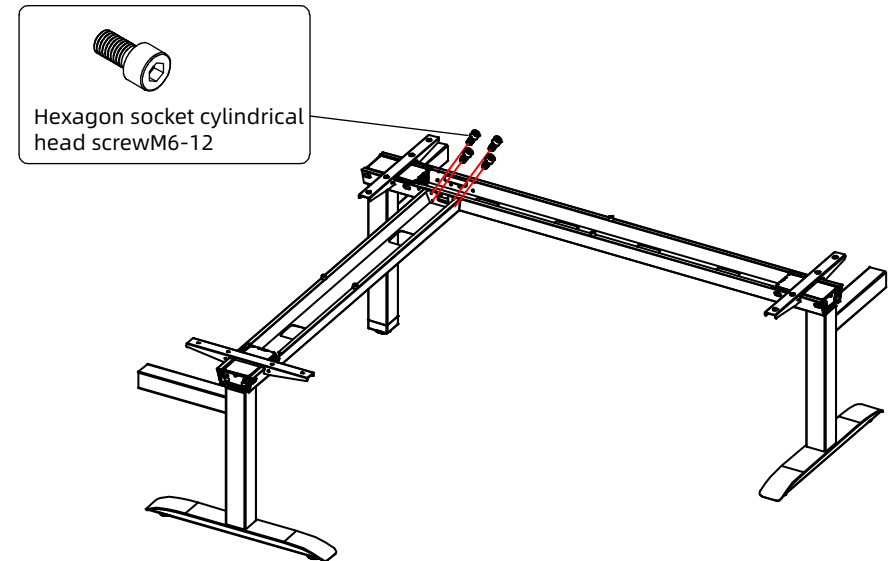

After adjusting the position, lock the screws of wireway under the desk


Step 7

1. Install the L-type column's end cover of the wireway under the desk (10) as shown in the figure ABS (Fig. 1)

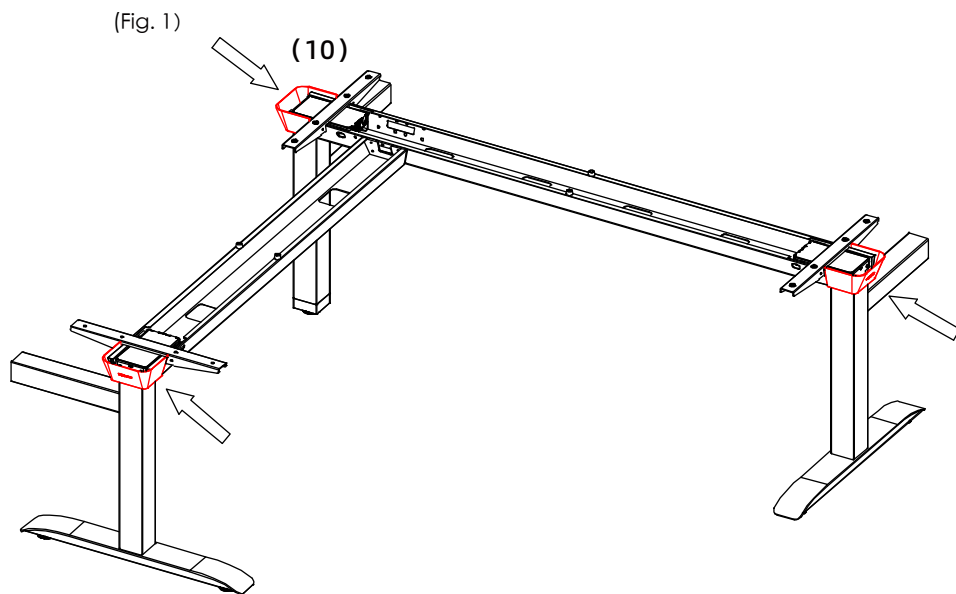

Step 8

Install the screen
For the details, please refer to the screen installation instructions

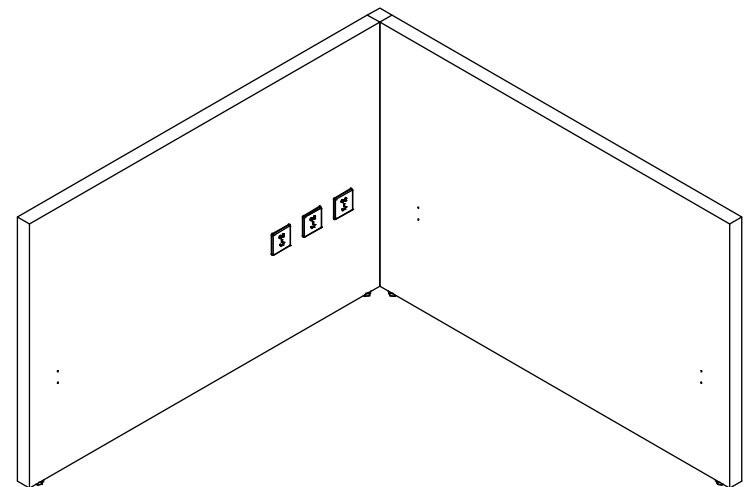


Step 9

Install the screen connector I

1. Install the screen connector onto the screen in the direction as shown in the figure


(Cross recessed big flat head tapping screw ST5.0-20)

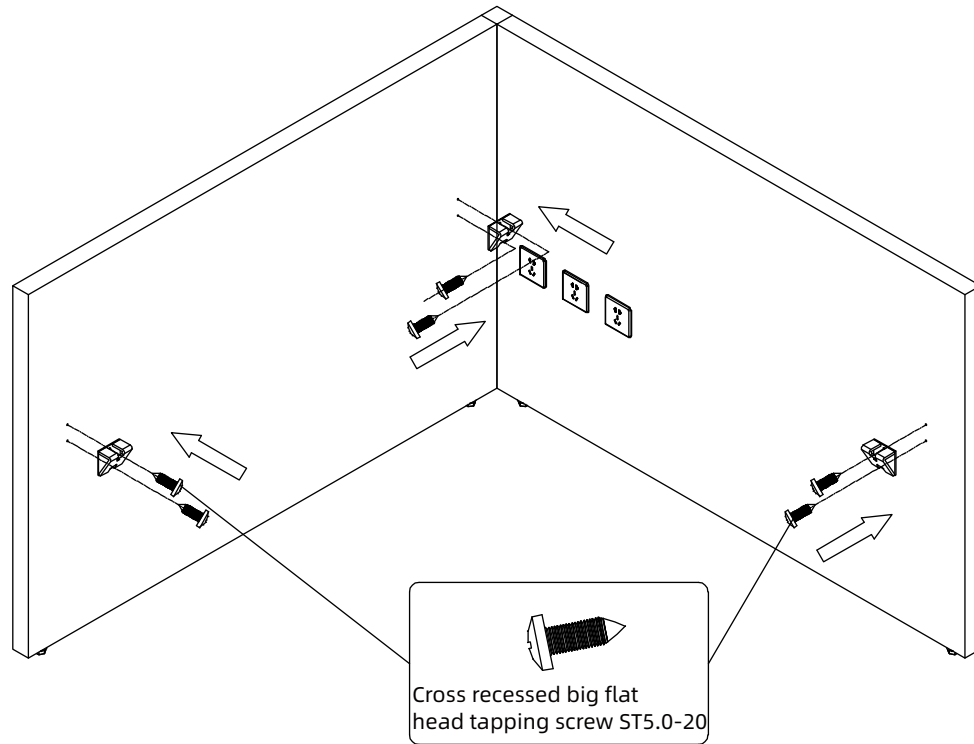

Step 10


Install the screen connector II

The screen connector is installed as shown in the figure below

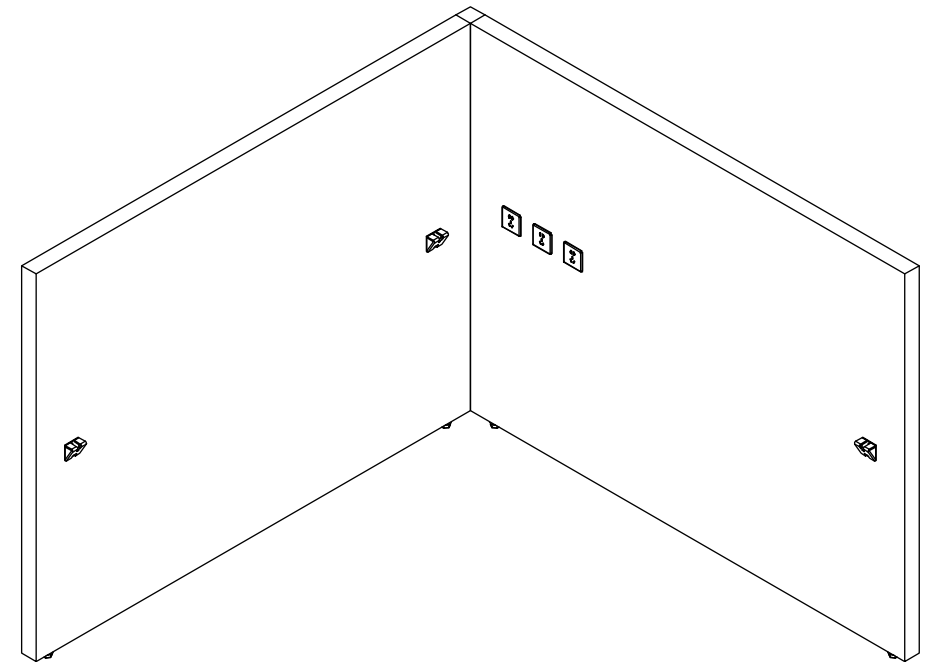


Step 11

Place the lifting desk frame inside the slot position of screen;
Place the desk frame in the direction as shown in the figure;
Put the screen connector inside the screen connecting pipe

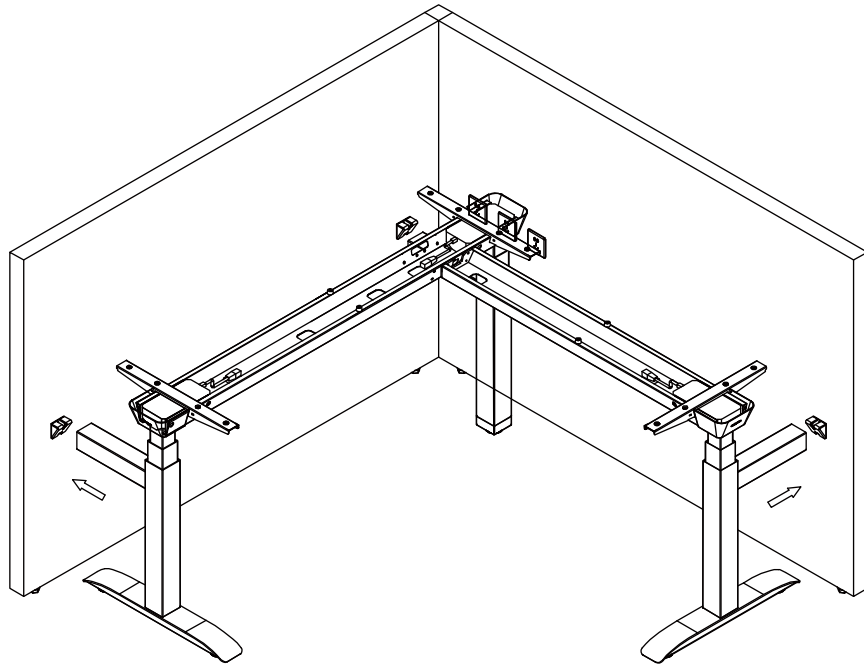


Step 12

Install the lifting desk frame and screen
1. Install the screen connector (Fig. 1)
(Hexagon socket cylindrical head screw M8-20)



(Fig. 1)

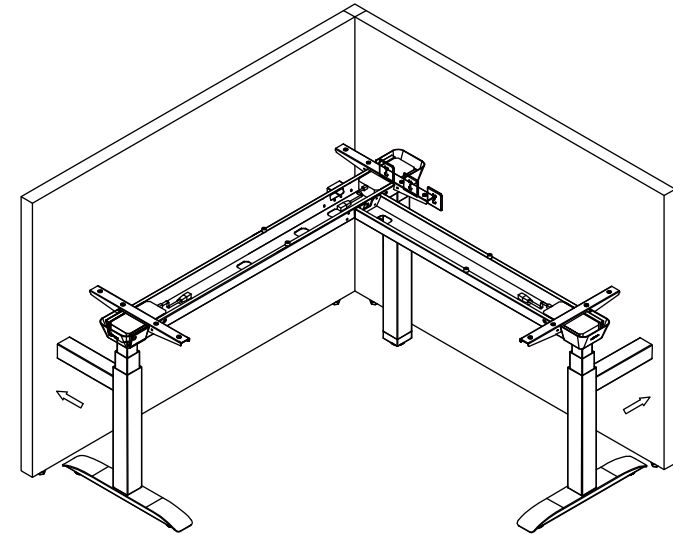

Lock all screws in this step!!!

Step 13

1. Install the wiring of lifting table

The controller (rose red) is arranged between two holes with the plane downward; it is located in the direction of routing; convenient for connection with the table board

The splitter (Rose red) is installed inside the wireway of auxiliary table (Cross recessed head tapping screw ST 3.5-20)

Gyroscope (Cyan) is mounted on the side of the controller and controller


Motor wire (yellow) Data cable (yellow) Connect the controller and splitter

Column (green)

Power cable (red)

Hand controller (blue)

In this figure, it is installed near the left side (as per the direction of workstation)

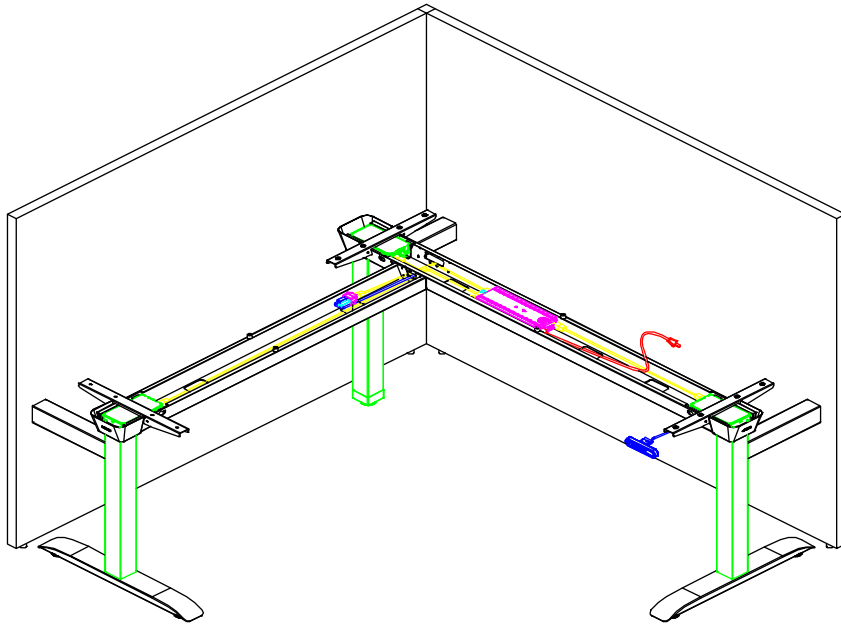

Step 14

Install the steel junction box of CEB socket

1. First thread the cables with quick connector through the opening as shown in the figure



2. Remove the plastic cap at two ends of the socket, and fix the socket onto the laminate with screws
(Cross recessed head tapping screw ST3.5-12)

3. Put the plastic cover on

4. Place the steel laminate with socket into the steel junction box as shown in the figure

5. Secure the bottom of steel box with screws
(Hexagon socket cylindrical head screw M6-12)

6. Steel junction box is installed

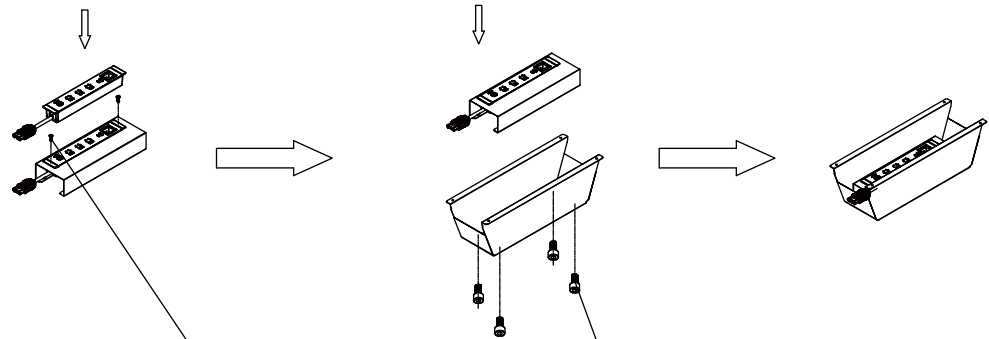

Step 15


Install the table board

1.As shown in the figure, a 15mm clearance is kept between the table board and screen; single side edge of table board is inward indented by 15mm

2.Install the table board and lifting desk frame
(Cross recessed big flat head tapping screw ST5.0-20)

3.Install the table board and steel junction box
(Cross recessed big flat head tapping screw ST5.0-20)

4.Install the single-clamshell cover

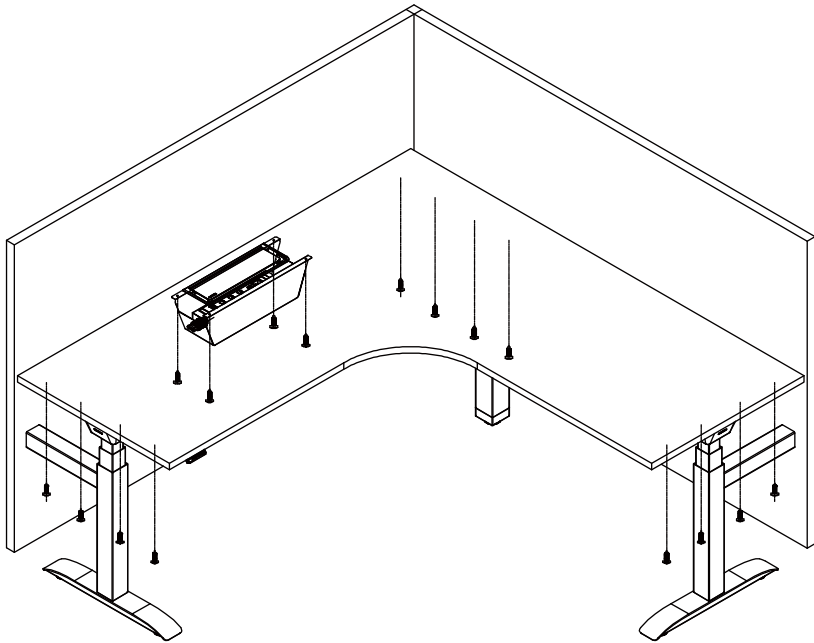

Step 16

Install the table board (in the following order)

1.As shown in the figure, a 15mm clearance is kept between the table board and screen,center them with the desk frame

2.Install the table board and lifting desk frame
(Cross recessed big flat head tapping screw ST5.0-20)

3.Then, lock the tank chain to the bottom of the table board in place
(Cross recessed head tapping screw ST 4.0-16)



4.Afterwards, fix the bottom of tank chain onto the side of the screen
connecting pipe with cross recessed self-drilling screws
(Cross recessed self-drilling screw ST 4.2-13)

5.Take off the buckle plate of tank chain, put the power cables in and finally
put the buckle plate on

6.Install the end cover of support arm of wireway under the desk as
described in the enlarged view below (Fig. 1)(Fig. 2)

7.Install the control box lock of lifting table under the desk board shown in
the figure below (Fig. 3)

8.Install the hand controller.
(DPF1C_(Cross recessed pan head tapping screw 3.5*16)
(DPF1K_Cross recessed pan head tapping screw 3.5*16)
(DPG1C_Cross recessed raised countersunk head tapping screw 3.5*32)
with the cable attached to the support arm(Fig. 4)




Use straight screwdriver to pry open

ABS support arm cover is flexible and slightly forced apart; seize one side, and then seize another side and then fasten them


Step 17

1. The installation is complete




Install the end cover of support arm of wireway under the desk



Install the hand controller



Install the power control box

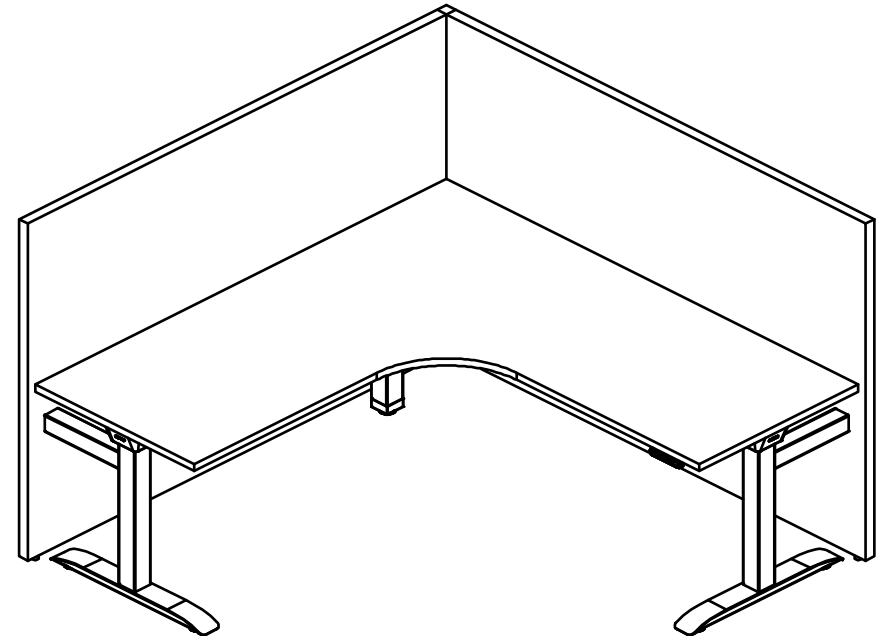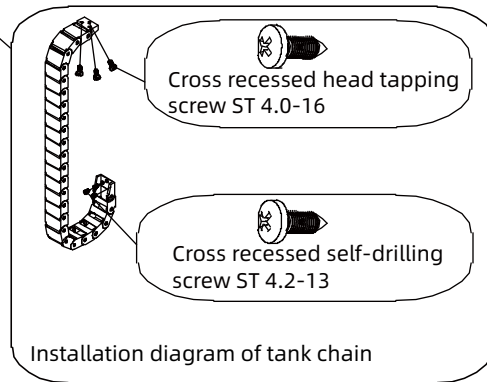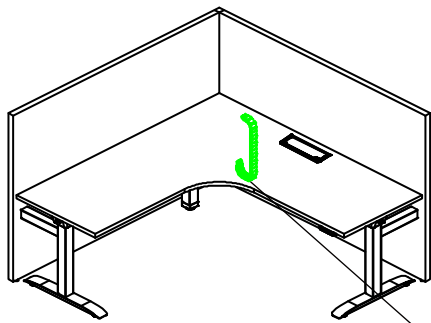

*Special note: Square columns and cylinders are installed in the same method