


Campers


Stove

NOVAH[®]

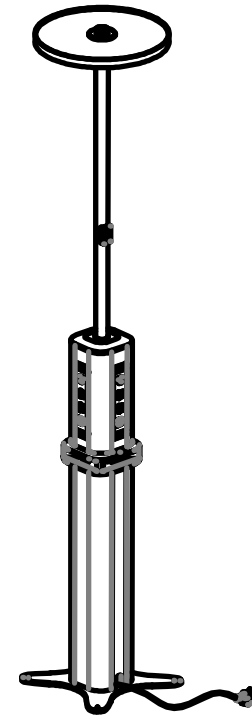

NOVAH System Technology Co.,Ltd.
Tel: 400-115-1688
Web: www.novah.cc
Mail: int@novah.cc

NOVAH[®]

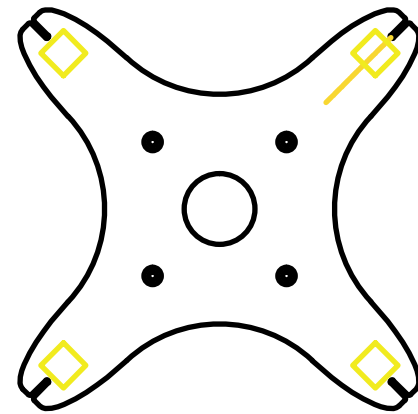

Stove Chassis

Product Parts List

Step 1

①




4x(Wool felt)

②




4x(Cross machine screw M6*20)

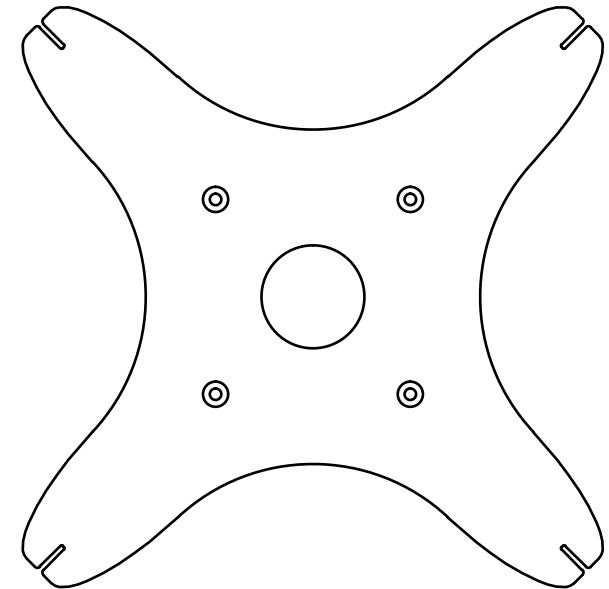


Step 2


The chassis's bottom is stuck with non-slip wool sticker

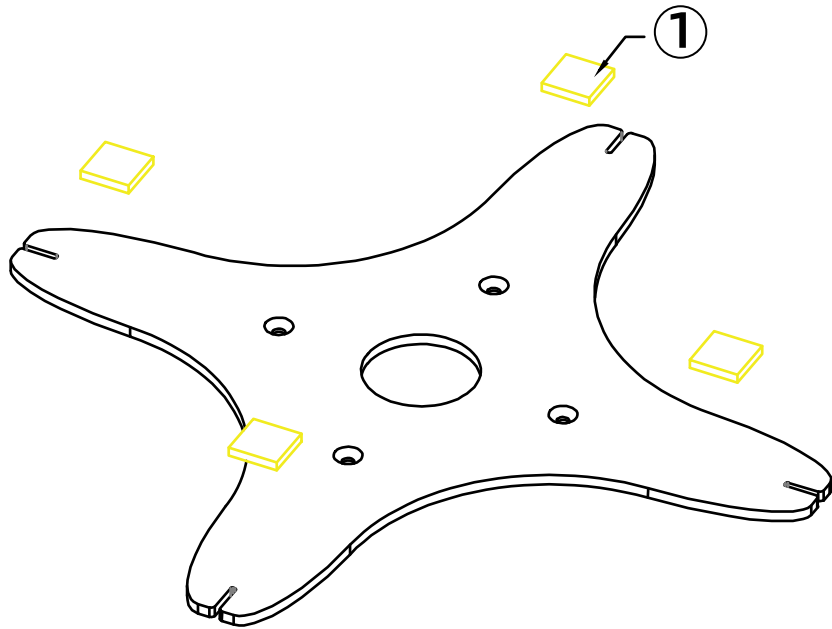

Step 3

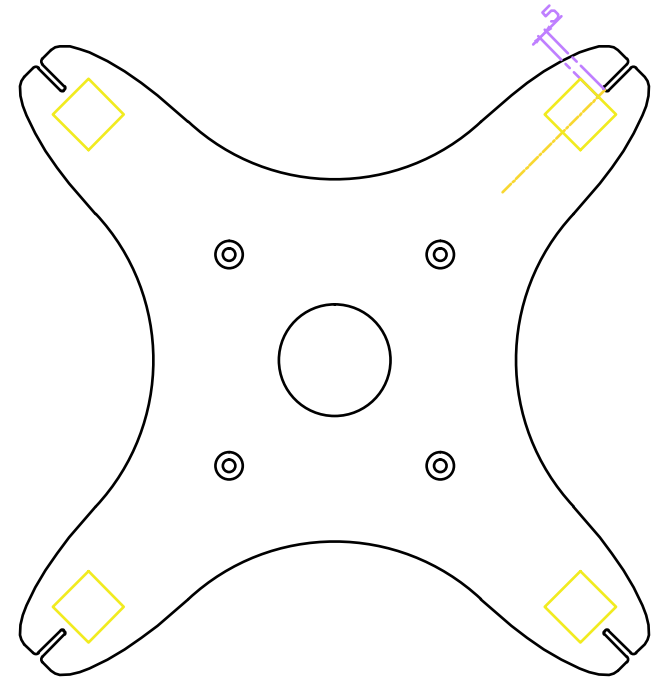

Product Parts List

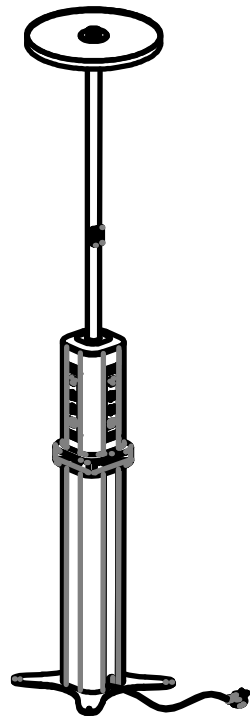

Stove Ontology

①




1X(Lower tray)

②



4X(M18*32)

③




1X(Routing column)

④




8X(M6*20)

⑤



1X(Upper tray)

⑥




1X(Power column)

⑦




8X(M6*6)

⑧



3x

⑨



1x

Step 1

Installation of roller latch for lower tray

Screw in four roller latch screws

10




8X(M3*6)

11




2X(One-female three-male)

12



1X(Wire in series)

13



1X(Power cord)

14



1X(Cover)

15



1X(Upper cover)

16



1X(Upper cover hole plug)

17



1X(M6*10)

18




1x

19



1x


Note: Roller latch's stepped face is flush with the lower tray

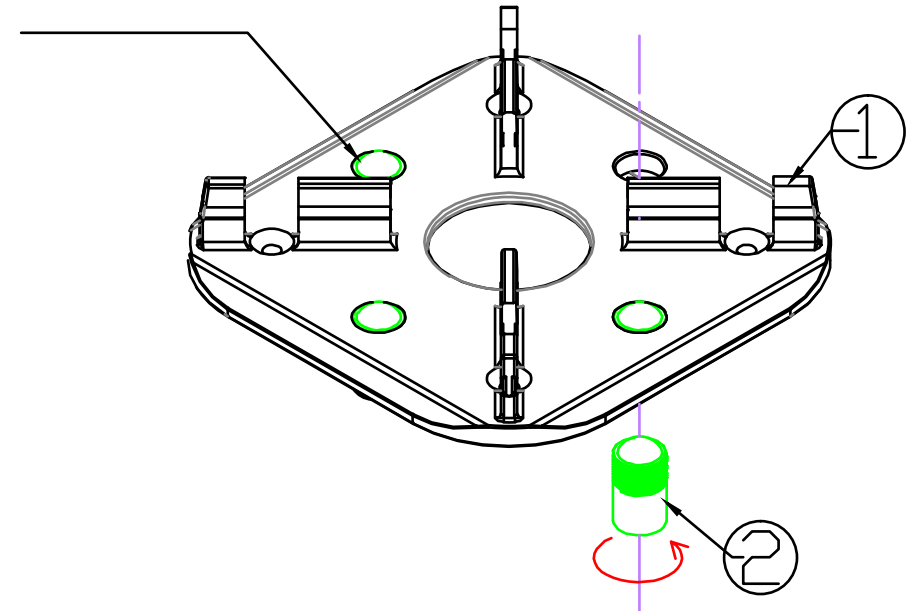

Step 2

Installation of lower tray and wiring column


Fix at upper and lower positions With four countersunk self-drilling screws

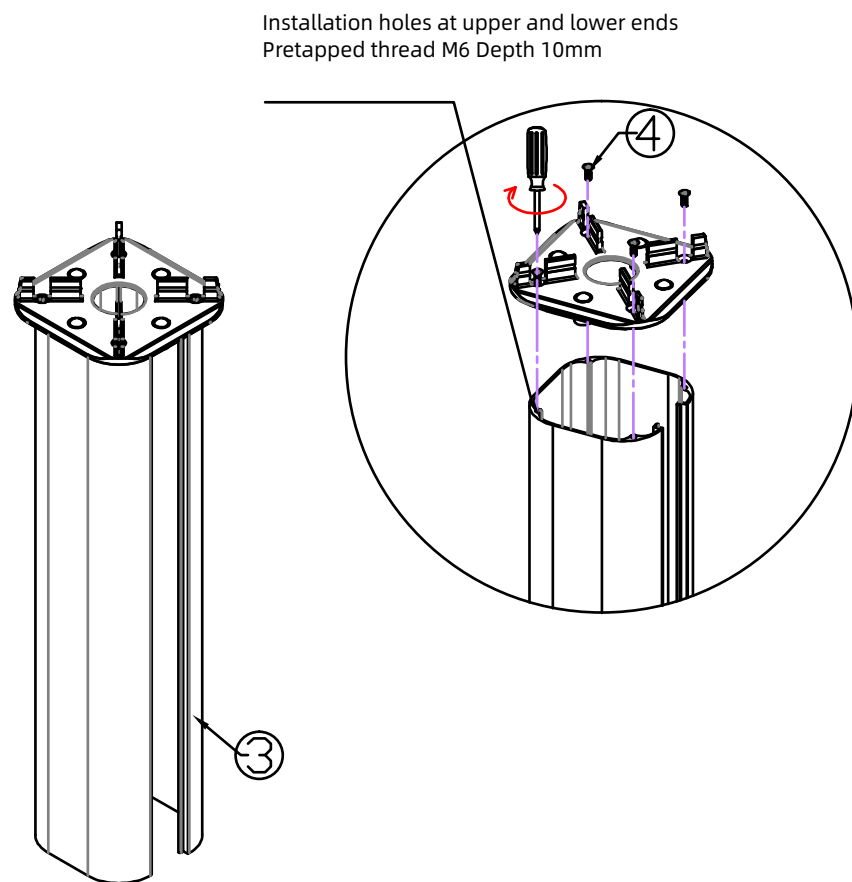

Step 3

Installation of upper tray and power column


With four countersunk self-drilling screws

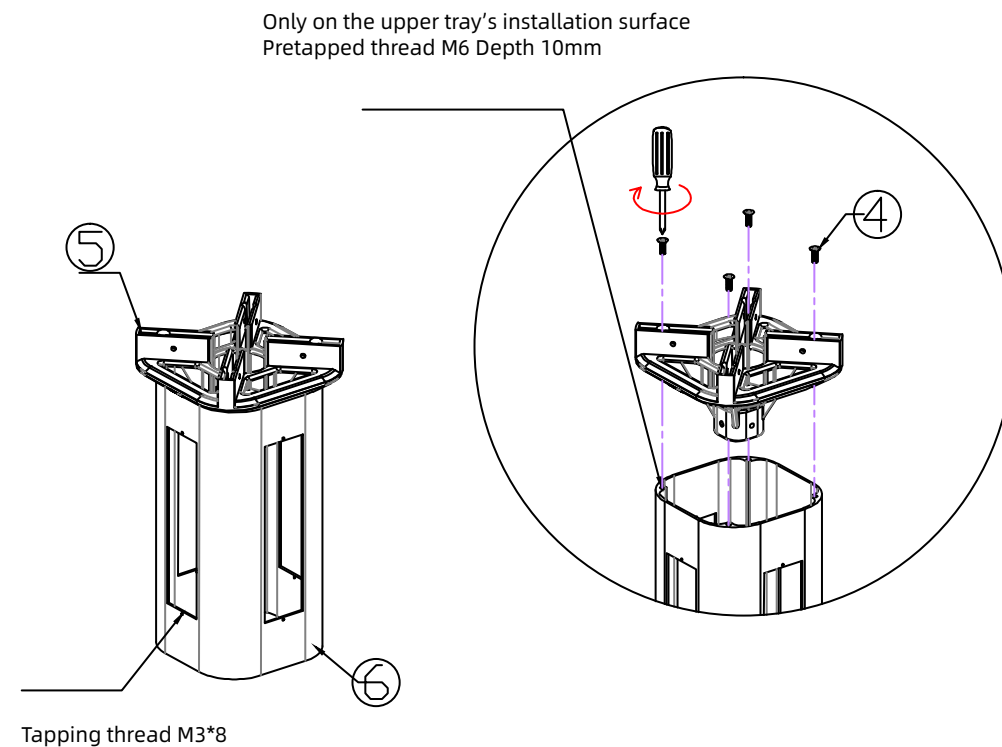

Step 4

Installation of upper and lower columns


Fix at upper and lower positions with 8 set screws

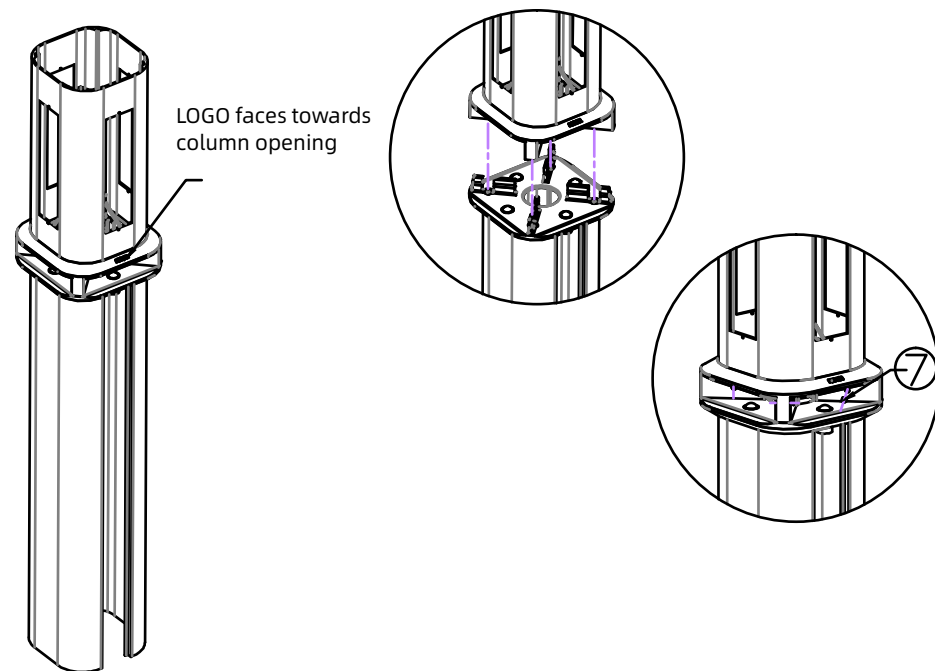

Step 5


Installation of EB power supply

Insert power supply into the lower column through wire hole of upper and lower trays

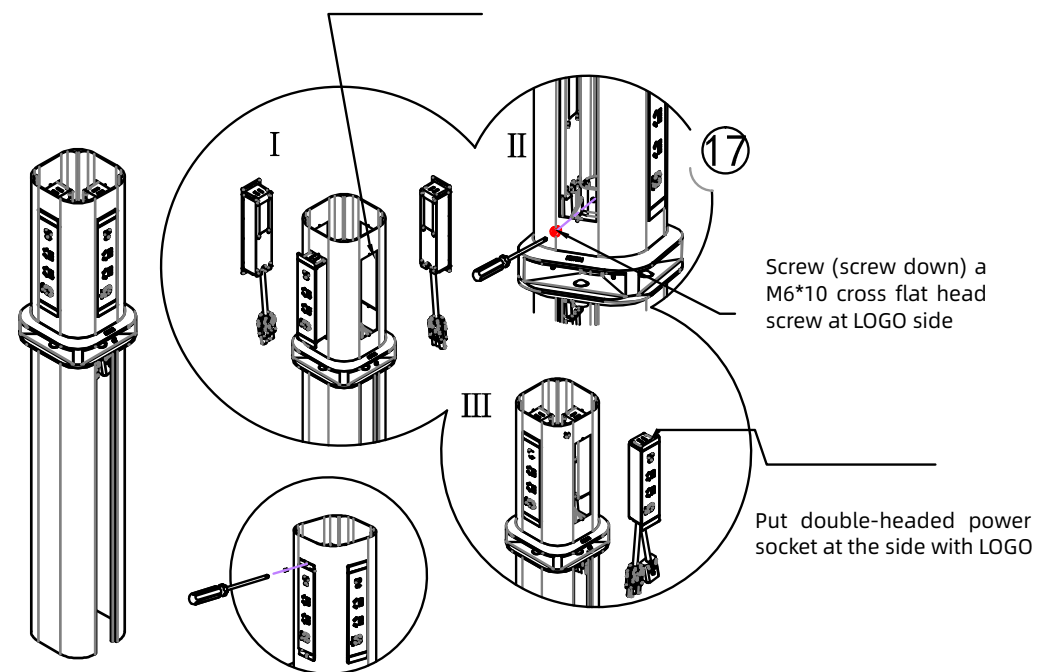


Step 6

Connection of socket inside column

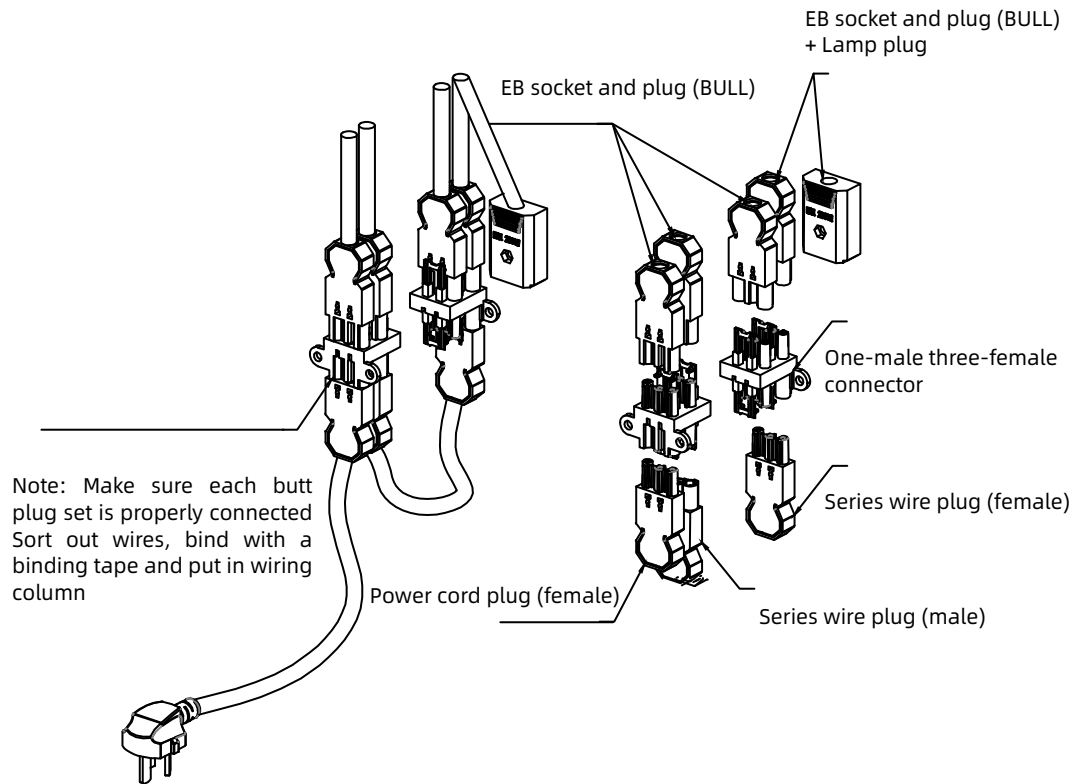

Step 7


Installation of lower column cover

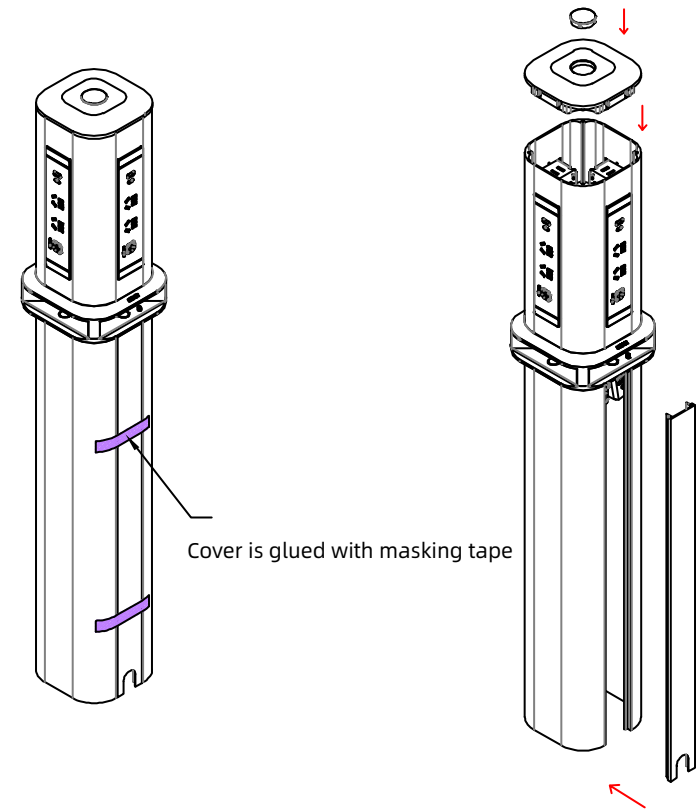

Step 8

Installation of chassis


Fix at upper and lower positions with 4 countersunk self-tapping screws and check non-slip mat to see if it is properly stuck

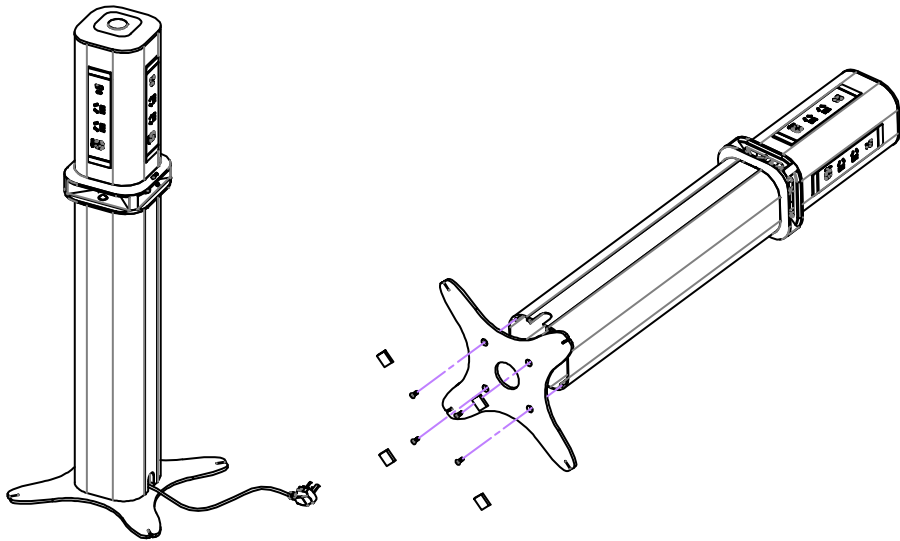

Step 9

Preparation for installation of LED post

1. Pull out hole plug
2. Remove the socket at LOGO side
3. Open the lower column cover from below
4. Unscrew lamp post's set screws

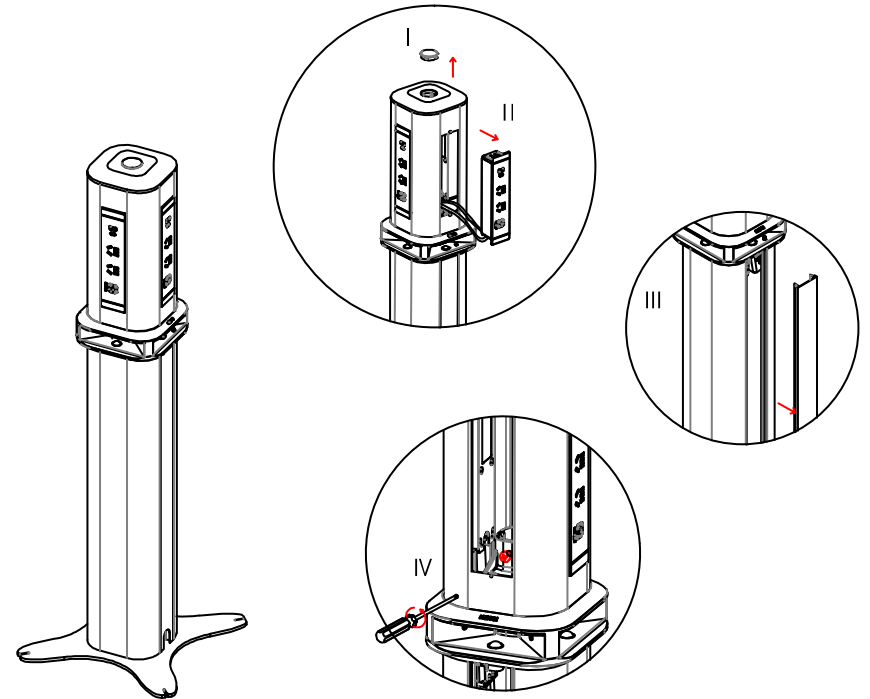


*Please wear gloves during operation to avoid scratch

Step 10

Assemble the lamp panel and lamp post of LED panel

Insert plug, screw LED panel in lamp post

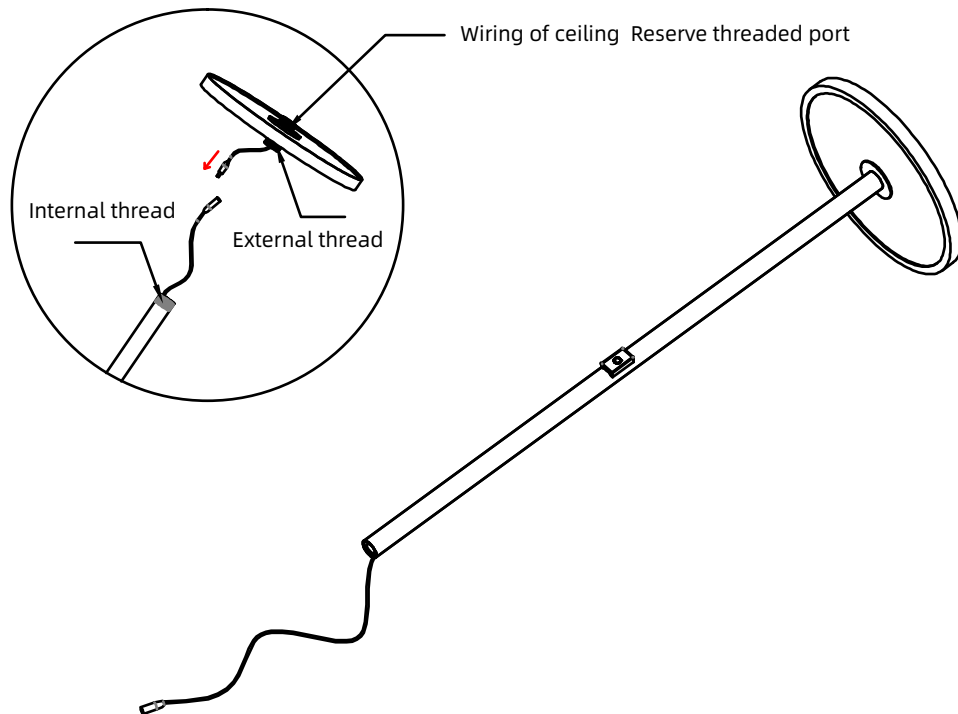


Step 11

Installation of LED post


Make sure each connector is securely connected

Sort out wires and put in the lower wiring columns

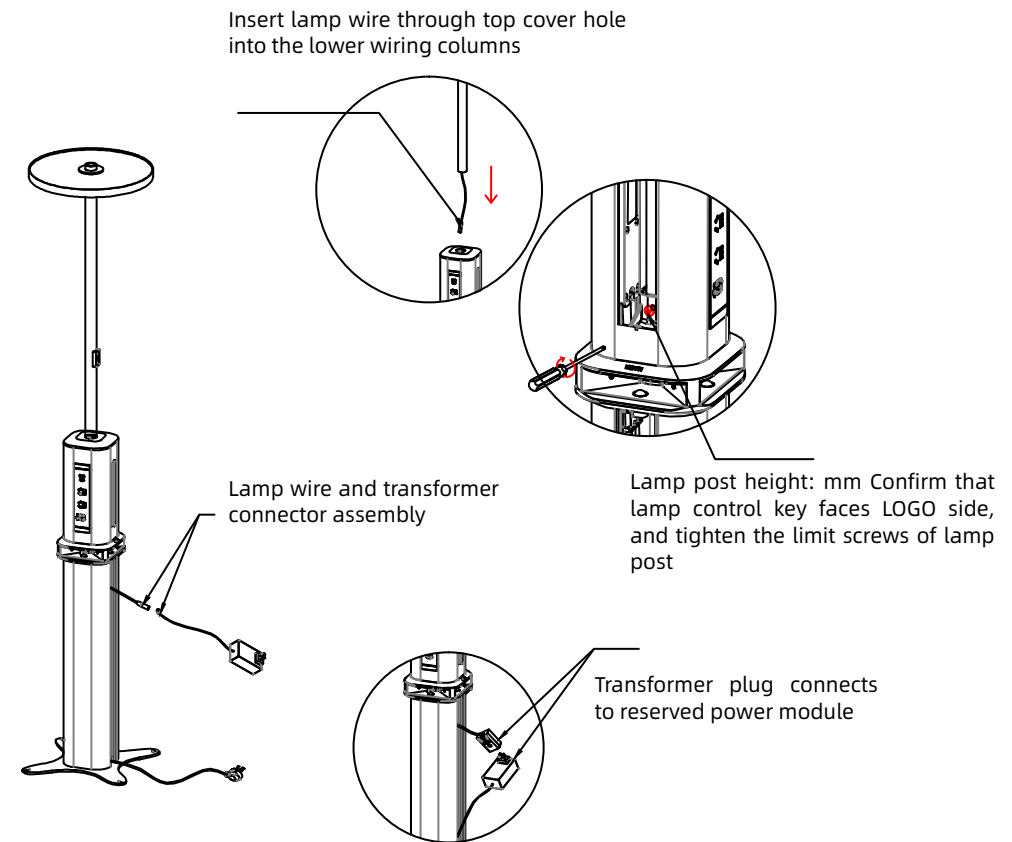


Step 12

The installation is complete

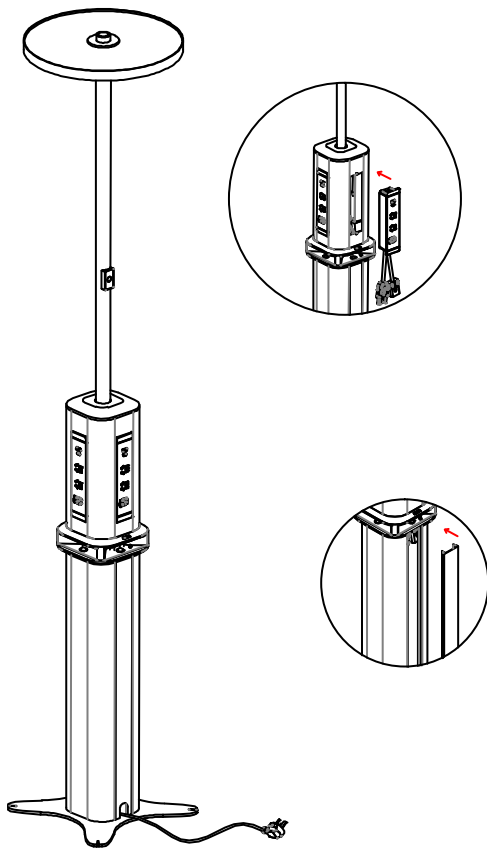

Expansion scheme

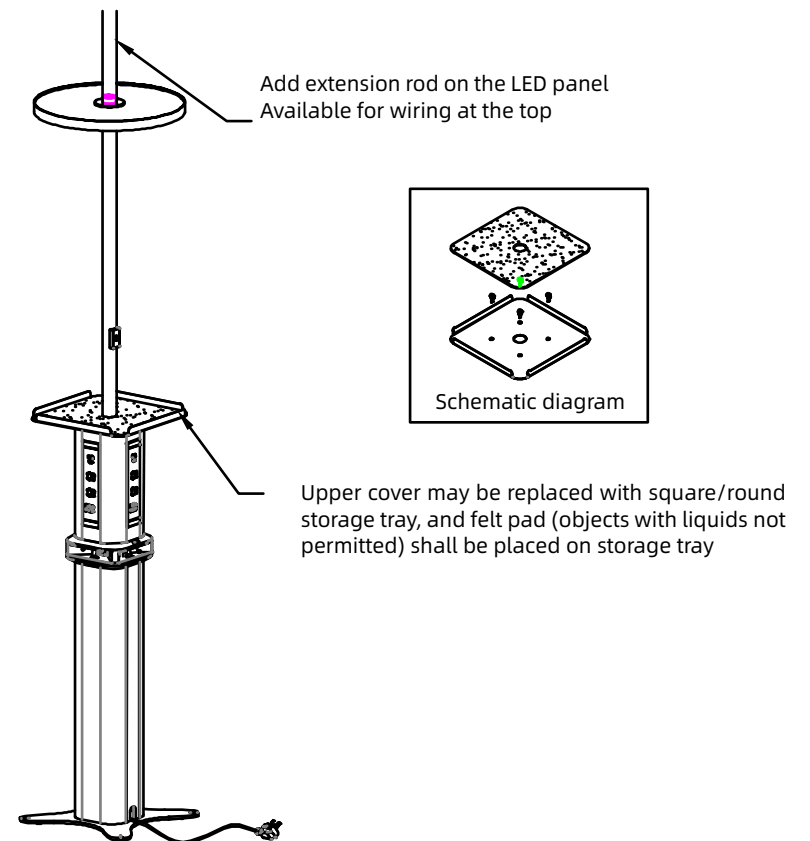

Step 13

Mount the ceiling wiring terminal of LED

